


F - 2000-12mm

CURRENT PROBE

The F-2000-12mm is ideal for laboratory and field testing from 10 MHz to 3 GHz.

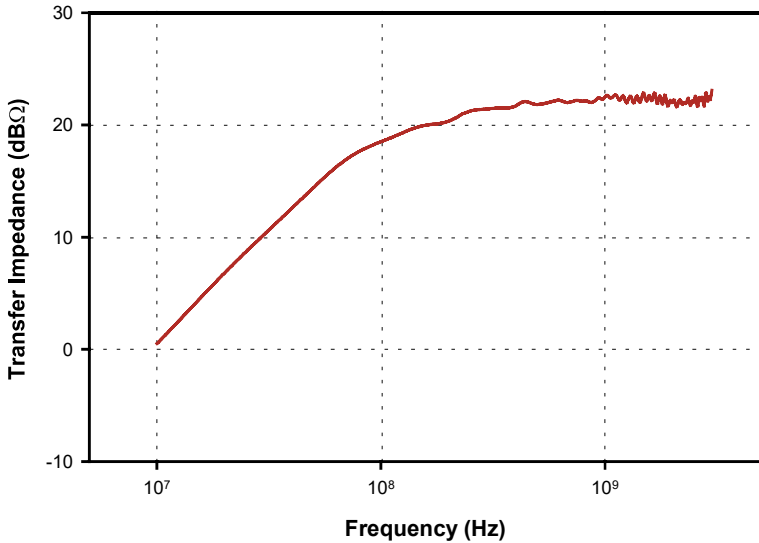

Specifications

Frequency:	10 kHz – 3 GHz
Internal diameter:	13 mm
External diameter:	37 mm
Height:	17 mm
Z _t Ω ¹ :	16
Connector:	Type-SMA
Max. Peak Current:	100 amperes
Max. RMS Current:	100 amperes
Drop Rate (%/microsec.):	
IT Max. (amp-sec):	
Useable Risetime	
Low Frequency 3 dB point:	100 MHz
High Frequency 3 dB point:	3 GHz

1: Probe calibrated with 50 Ω + j0Ω Load Impedance.



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.